



		Android 11	
		MTK 6762 2.0Ghz	
		RAM:4GB,ROM:64GB	
		5.5	
		TFT	
		720 x 1280	
		17 × 2	
τ	γ		
		4	
τ	γ		
*	/	3500m/5000m	
		±(1mm + 1 x 10 ⁻⁶ · D)	
		0.3 0.1	
τ	γ		
*	90%	1000m	
	60mm×60mm		
	0~500m		±(2mm + 2 x 10 ⁻⁶ · D)
	500~1000m		±(5mm + 2 x 10 ⁻⁶ · D)
		0.3-3	
		0.5"	
		79mm	
		0.1" /1"	
ATR			
		3-2000m	
	360°	800m	
		800m	
		0.5"	
		3-5s	
		±1.5°	
PS			
*	360°	1.5-500m	
		90° 3.5s	
		±18°	

	45°/s
	154mm
	Φ48mm Φ50mm
	30X
	1°30’
	3”
	1.4m
	±4’ 0.5”
	30”/2mm
	8’/2mm
WIFI	
USB	OTG
/	
	USB-TypeC TF SIM Micro-SIM
	x 2
	5400mAh
	8.4V
	8
	217mm×198mm×378mm
	7kg
	IP55
	-20 60
	-30 70

SMOS

Й


Й

Й

Й

Й

40

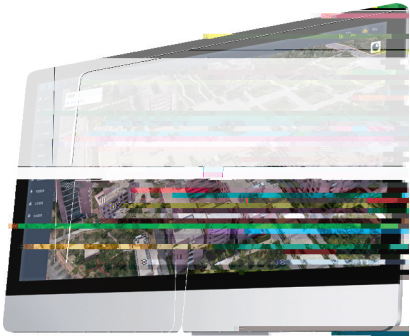

NT10(0.5”)



400-7000-700

www.souths_




*

40km D

*



1. The first step is to identify the problem and the data sources.

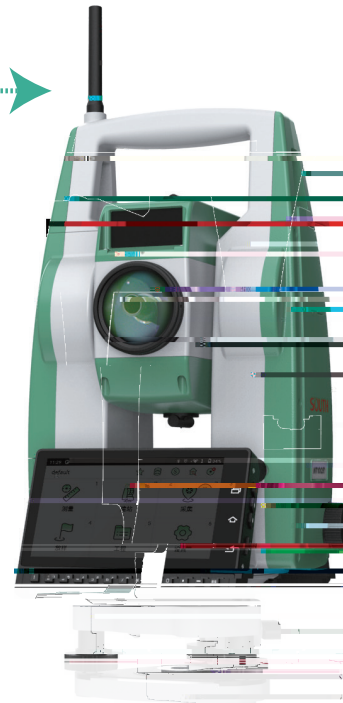

...

SMOS