


RUIDE

瑞得仪器

瑞得全球

RFID 3000M 系列 ELECTRONIC TAG TOTAL SOLUTION

全球唯一
RFID 3000M 系列
ELECTRONIC TAG
TOTAL SOLUTION

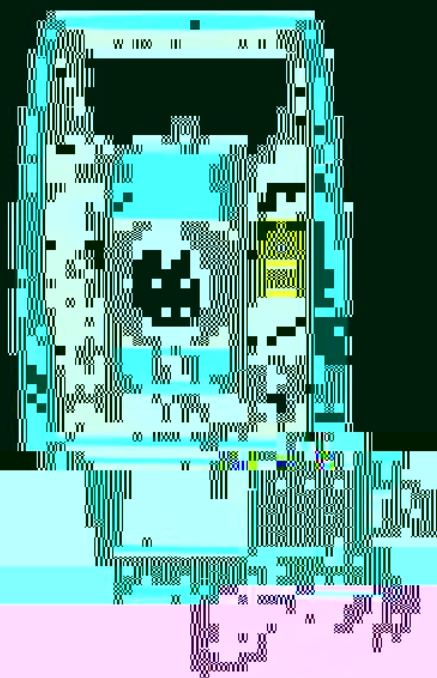

.....	6
-------	---


.....	13
-------	----



.....	18
-------	----

.....	20
-------	----

.....	23
-------	----

.....	74
.....	75

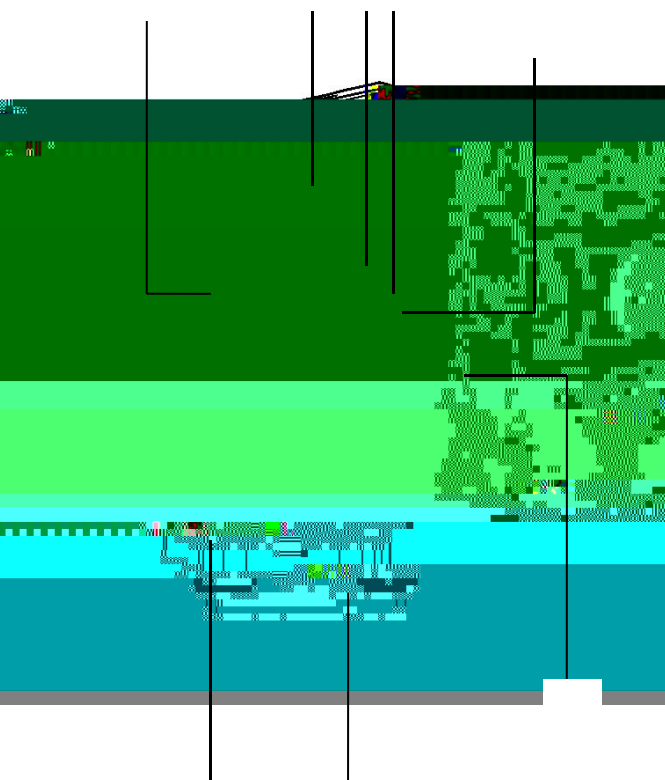

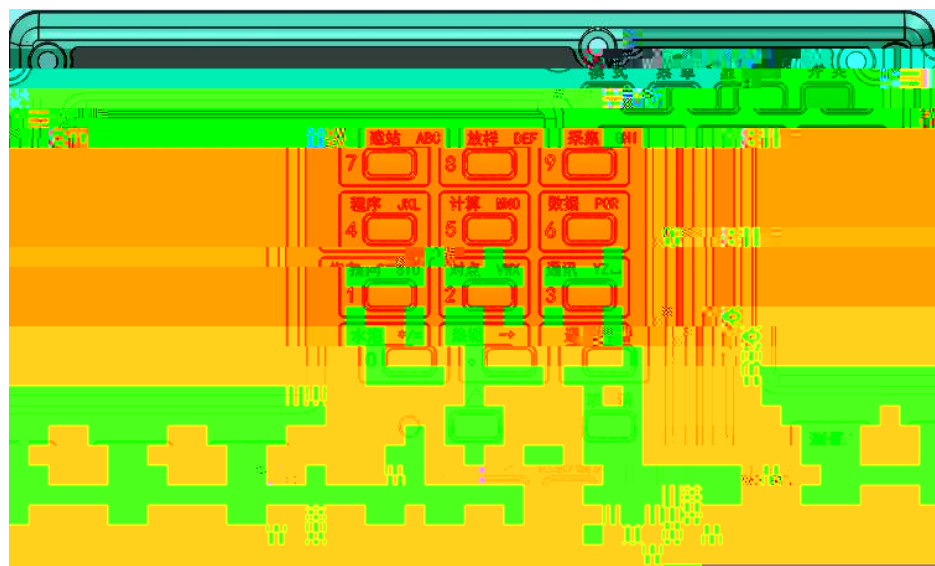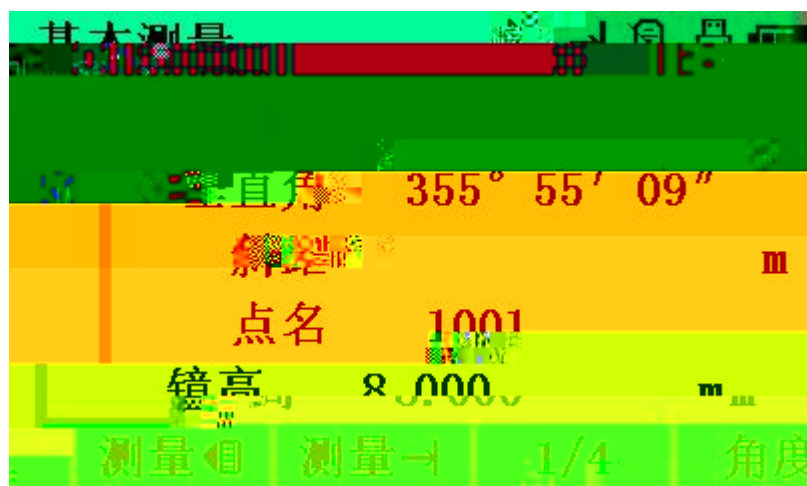



xB



快捷设置


1. 电子气泡

6. 电源背光设置

K^ • %öy 7

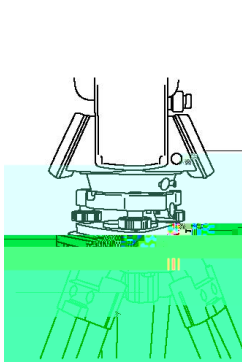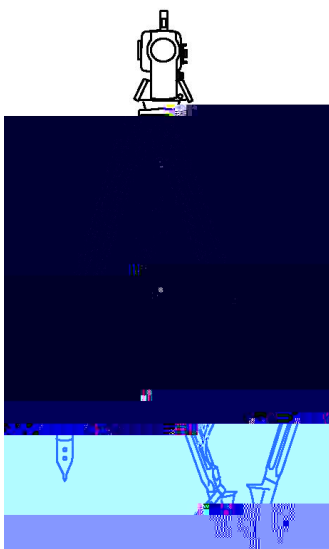

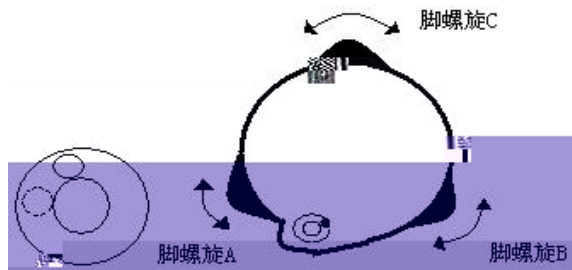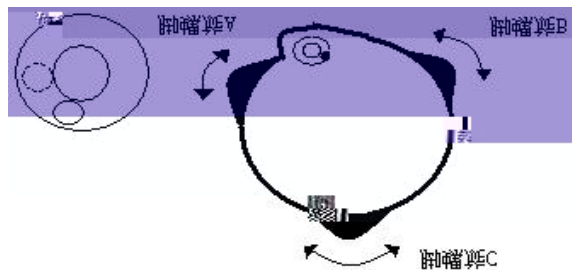

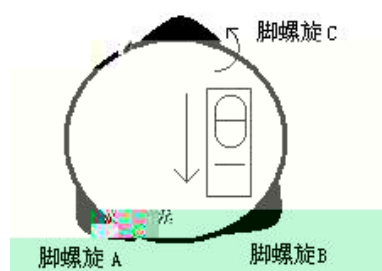

基本測量		88	115° 09' 37"
垂直角	355° 55' 09"		
斜距離			
点名	1001		
距離	1.4		
角度	115° 09' 37"		
測量	測量	1/4	角度



.

.



.



.



.






Y

E


=====

Ã


@

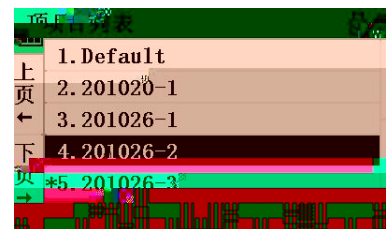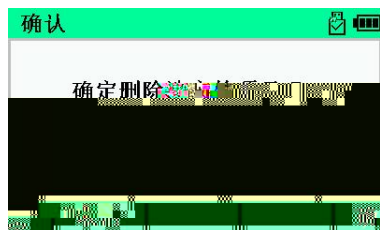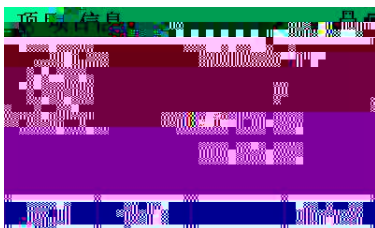

Q'#...

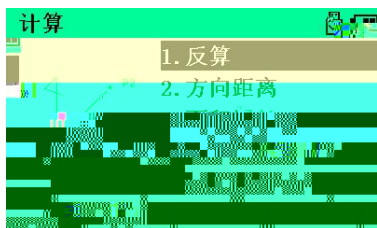



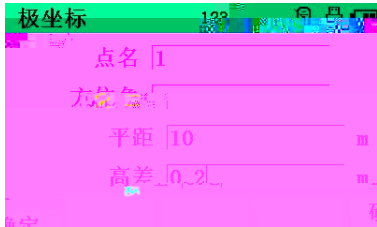

导线123

点1	1
点2	2
+AZ	0
平距	10m
高差	1.5m

保存123

北(N)	-5.815m
东(E)	7.631m
高程(Z)	-6.579m

点名

编码

调用

确定

导线123

点1	1004
	1000
+AZ	
平距	m
高差	m

面积周长

1	1001
2	1003

1003

下页

删除

计算

新增

计算结果

面积

0.000 m2

周长

10.000 m

定义直线

1. 输入方位角

2. 输入距离

计算方位角

计算距离

取消

确定

直线偏心

123

点名

1003

方位角

0

取消

确定

直线偏心

123

STA

10

m

O/S

5

m

dVD

1.3

m

取消

确定

保存 123

北(N) 8.285 m

东(E) 7.922 m

高程(Z) 2.844 m

点名 1005

直线偏心 123

点1 1004

点2 1002

输入 调用 测量 确定

直线偏心 123

STA 1 m

O/S 5 m

dVD 4 m

取消 确定

保存 123


北(N) -1.280 m


东(E) 9.922 m

高程(Z) -1.577 m

点名 1006

取消 调用 测量 确定

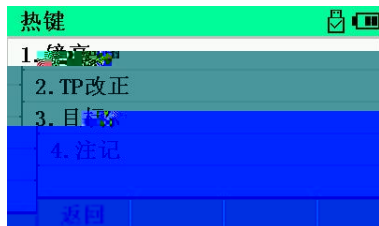

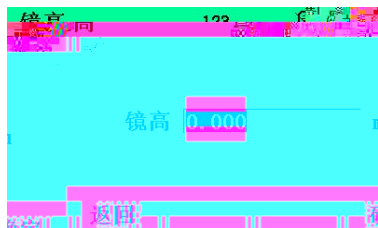

目标选择

0.00	0.0000	上页
-30	0.000	←
-30	0.000	下页
-30	0.000	

返回

编辑

设置

返回

注记123

注记

返回

确定

基本测量

水平角	11° 15"
垂直角	24° 08' 10"
斜距	3.775
点名	1006
镜高	0.000



测量


测量

1/2

测量



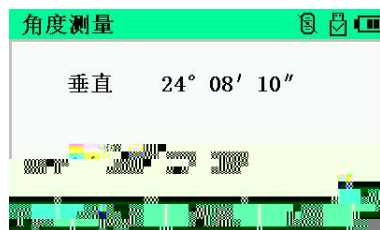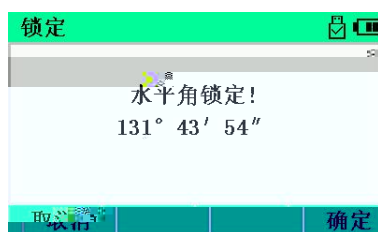

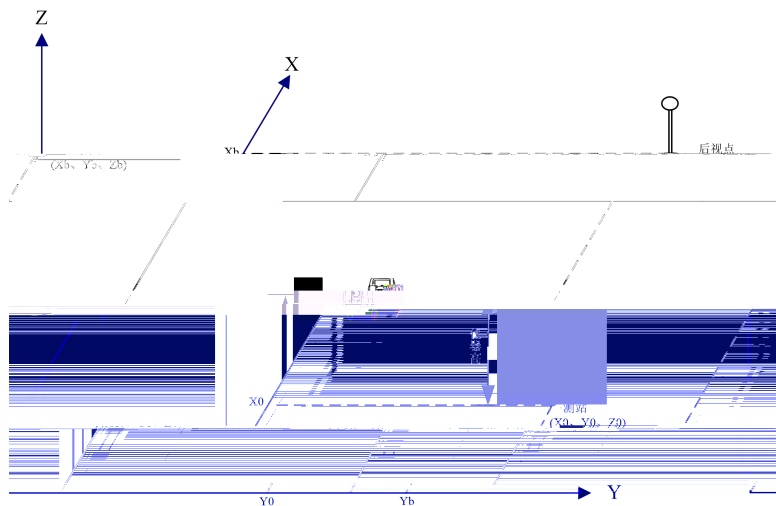

后视选择  

1. 坐标
2. 角度

取消

后视点   

点名

1003

镜高

0.000

m

输入

新建

调用

下一

照准目标  


方位角	119° 51' 28"
平距	3.427 m
斜距	3.498 m
dVD	0.00040 m
dVD	1.345 m

测量

测量

1/2

确定

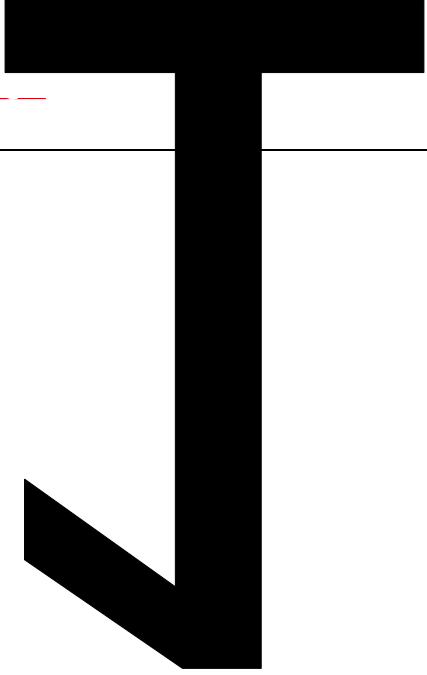



快速设站 123

点名	<input type="text"/>
仪高	<input type="text" value="0.000"/> m
后视点	<input type="text"/>
方位角	<input type="text"/>




输入 新建 调用 确定

后视检查

后视读数	0° 00' 00"
水准	0° 11' 52"
水平差	0° 11' 52"

退出

雷劈

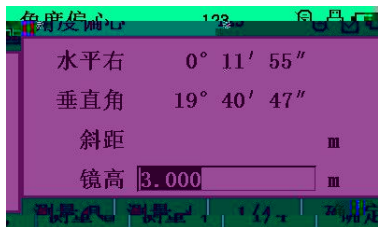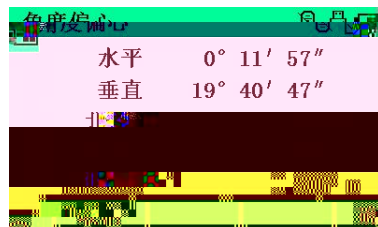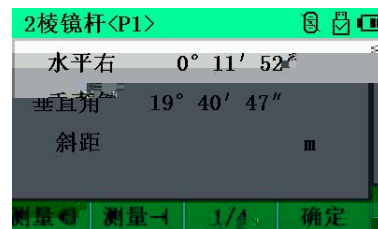

保存 132

P1-P2

m

P1-目标

2

m

返回

确定

距离

5.000 m

输入

距离

1.284

测量

返回

确定

保存 132

点名

6

视高

3.000

m

编码

返回

调用

确定

固定线(R1)

示, 水平左

352° 40' 01"

垂直

19° 30' 38"

斜距


m




测量

1/4

确定

测量

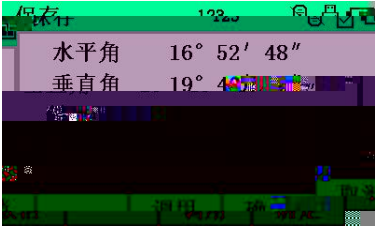

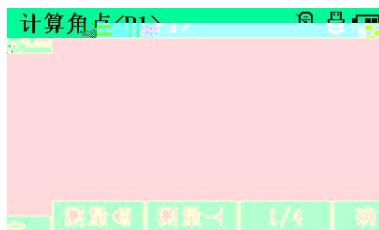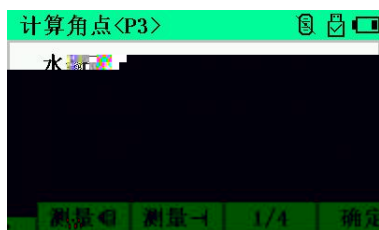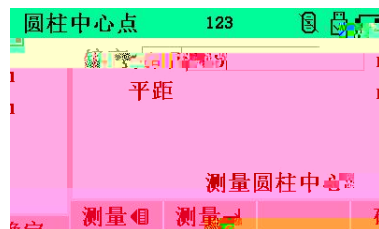

圆柱中心点123

平距4.553

左方向10° 33' 23"

右方向10° 33' 23"

测量圆柱右边角

取消计算

保存123

北(N)3.561 m

东(E)2.428 m

高程(Z)-6.170 m

点名1002

编码0.000

取消确定

测量123

水准

测量1/4

距离偏心123

水平10° 33' 28"

垂直19° 37' 30"

斜距4.827

取消确定

保存123



点名1002


镜高1.500

编码

取消确定

平面图: _____ 纵面图:

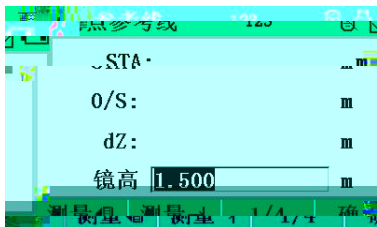

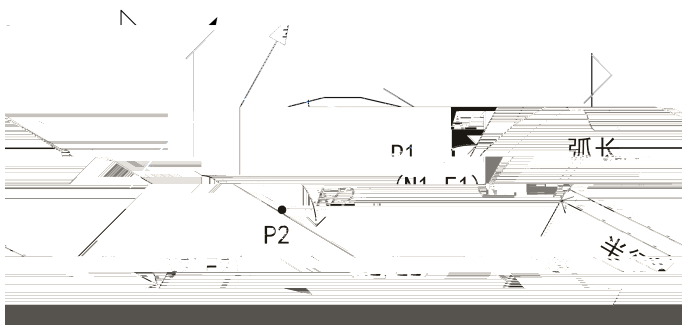

起始点 123

点名 1000

方位角 32.5

取消 确定

定义曲线

1. 点-方位角
2. 半径-方位角
3. 半径-弧长


取消

半径 11807.131 m




圆心角 306.07°



120 2° 00' 00"


取消 确定

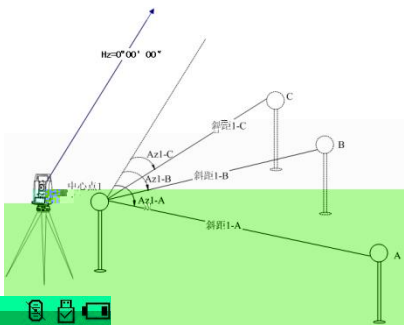

对边/射线		123			
斜距		3.304 m			
垂距		-0.328 m			
平距		3.288 m			
镜高		1.500 m			
量 测量 1/2 确定					

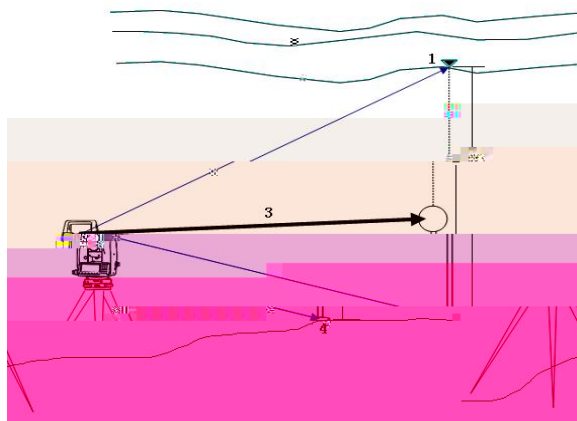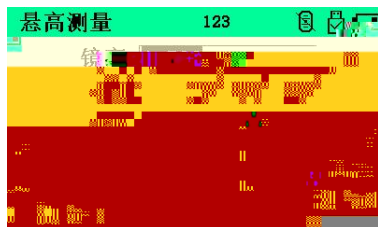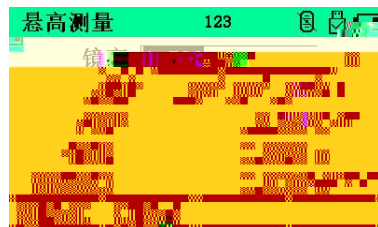

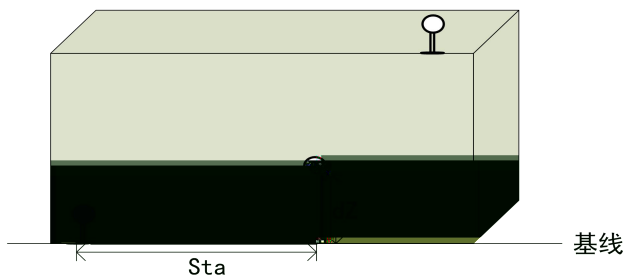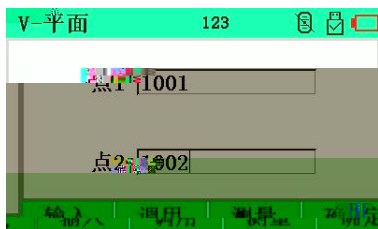

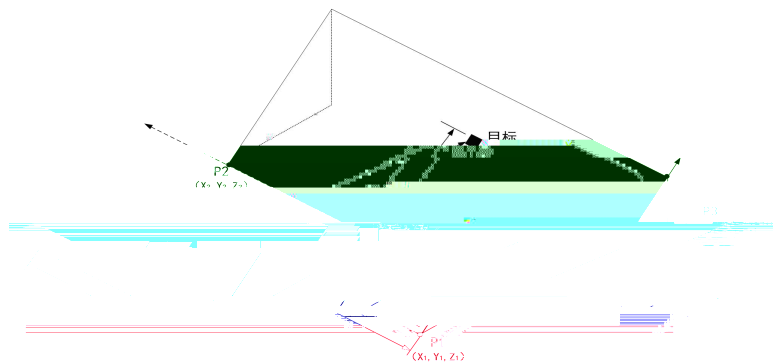

测站

S-平面 123

点1 1000

点2 1001

点3 1002

S-平面

水平角 12° 43' 14" m

垂直角 0° 00' 03" m

a 2.853 m

b 0.000 m

取消 1/2 保存





保存 123



北(N) -0.915 m


东(E) 1.594 m

高程(Z) -6.293 m

点名 1002

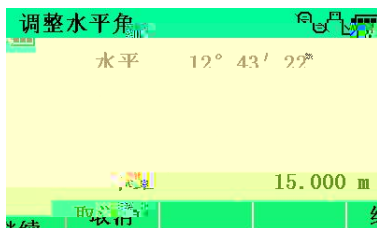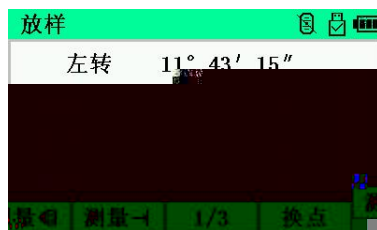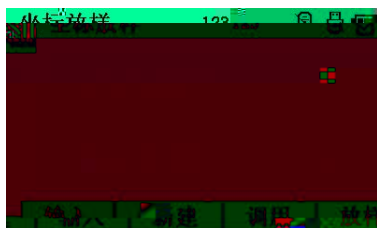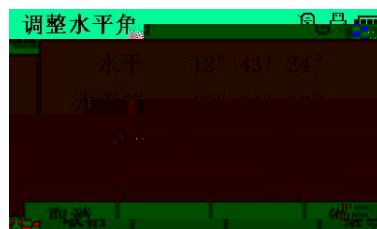


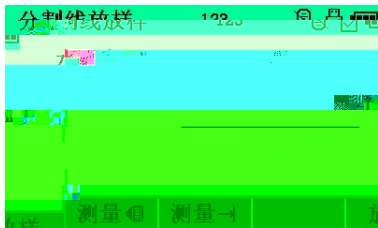
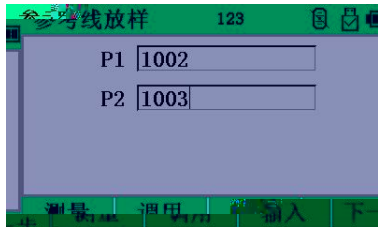



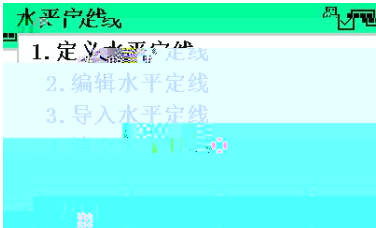


起始点	123			
桩号	<input type="text" value="0"/>	m		
方位	<input type="text"/>			
北(N)	<input type="text" value="0"/>	m		
东(E)	<input type="text" value="0"/>	m		
	返回		确定	

水平定线				
桩号	0.000	m		
方位	0° 00' 00"			
北(N)	0.000	m		
东(E)	0.000	m		
返回	直线	圆曲	缓曲	

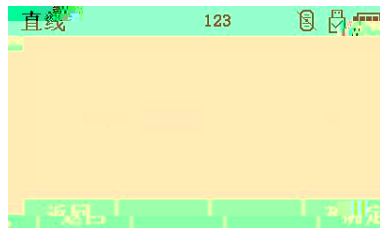

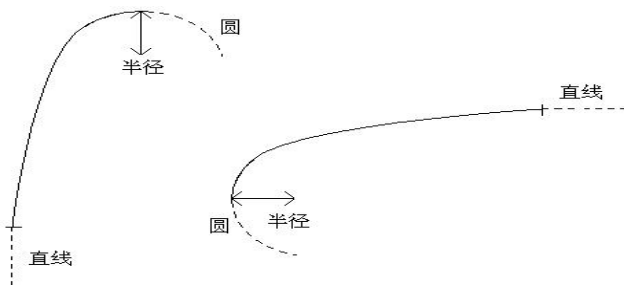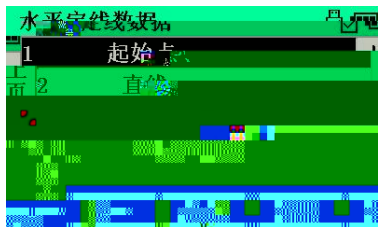

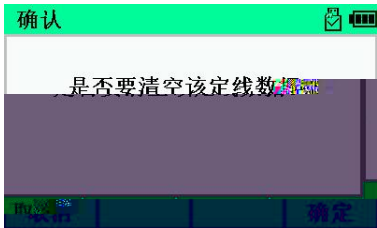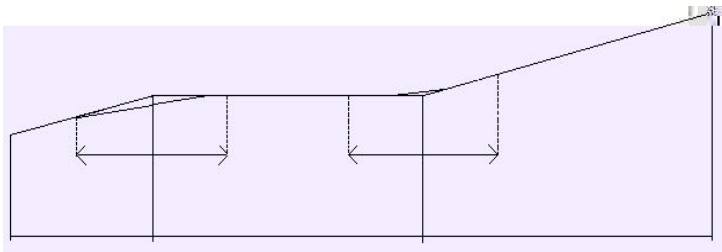

垂直定线		123	
桩号	<input type="text" value="0.000"/>	m	
高度	<input type="text" value="0.000"/>	m	
长度	<input type="text" value="0.000"/>	m	
返回		确定	

垂直定线

123

桩号

10

m

高度

20

m


长度

0.000

m

返回

确定

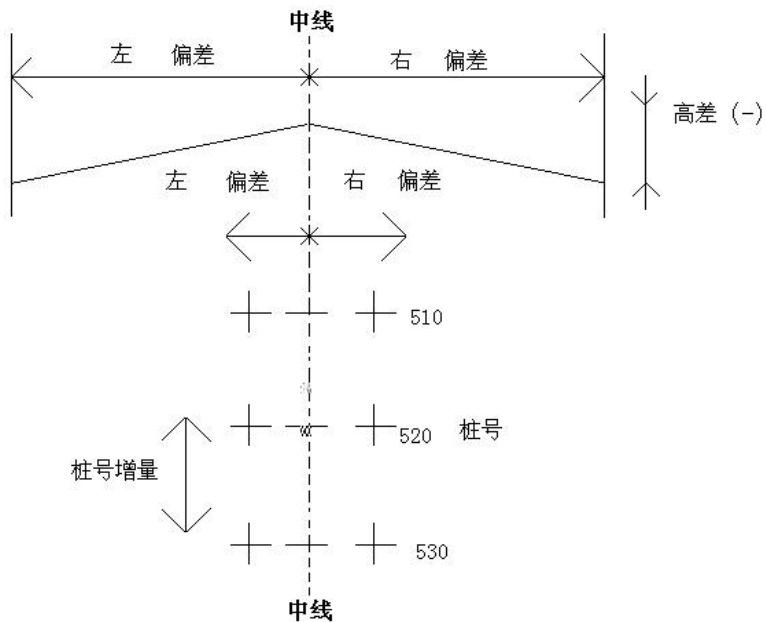

道路放样 123

起始桩 m

桩间距 m

道路放样 123

桩号 m

偏差 m

高差 m

桩号 m

返回 增桩 减桩 下一步

放样坐标

北(N)	0.993 m
东(E)	0.100 m
高程(Z)	20.000 m
返回	下一步

放样

左转	50° 46' 02"
移近	1.826 m
向左	0.454 m
填方	7.804 m

道路放样 123

桩号	0.000 m		
偏差	0.000 m		
高差	0.000 m		
镜高	1.500 m		
返回	增桩	减桩	下一步

[illegible]

